

► Europe

Make sure the button slide back to the center, then press the button for Europe plug to pop out as shown.




USB A type charge port.

► CAUTION:

- Before use, please read this instruction carefully! This product does not convert voltage(AC-AC), in order to avoid possible damage to your device or other safety hazards, please make sure the Power outlet you intend to use has the proper voltage to run Your device BEFORE using this adapter
- Each country has its own regulations regarding the use of travel adapters, please check in each country before use No grounding
- This product is for use with unearthed or doubleinsulated appliances only
- Indoor use only.



Waste electrical products should not be disposed of With household waste. Please recycle where facilities exist. Check with your Local Authority for recycling advice.

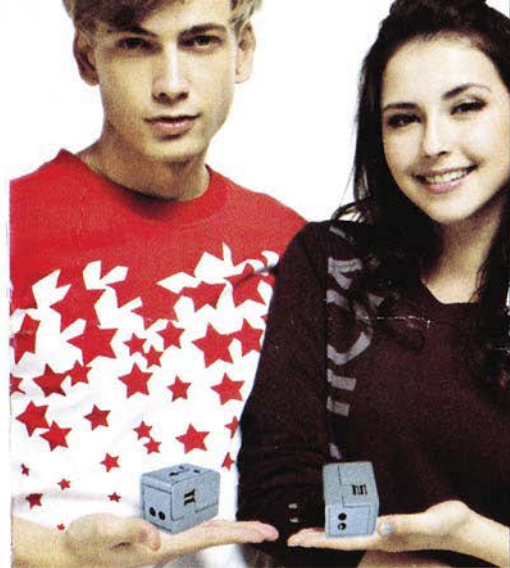


WORLD TRAVEL ADAPTER
THE ORIGINAL

Multi-Nation Travel Adapter With 2.1A USB Charger

► FEATURES:

- AC Power Rating: 6A max. 100-240Vac (660W max. at 110V, 1380W max. at 230V)
- USB Power Rating: 2,100mA +5Vdc(10.0 W)
- Single Plug Safety Feature
- Built-In Safety Shutters
- LED Power Indicator
- Built-In 6A Fuse
- Patents Protected
- Covers more than 150 countries with US / EU / UK / AU Plugs.
- Built-in safety shutters protect users from the direct touch of the live parts on the socket outlet.
- Only one plug-type can be used at one time by sliding the knob selection, other plug-pins are locked automatically.

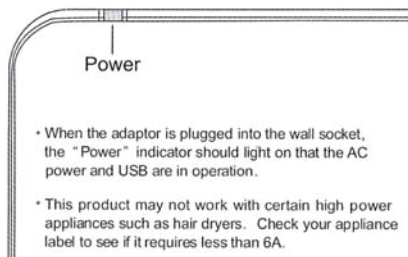


- When the adaptor is plugged into the wall socket, the "Power" indicator should light on that the AC power and USB are in operation.
- This product may not work with certain high power appliances such as hair dryers. Check your appliance label to see if it requires less than 6A.




► USA

Slightly press the button and slide to the right for USA / AUS plug completely as shown. Make sure the contact blades are turned to the parallel position.



► Australia / New Zealand

Slightly press the button and slide to the right for USA / AUS plug completely as shown. Make sure the contact blades are rotated to "1/" position.



► United Kingdom

Slightly press the button and slide to the left for UK plug completely as shown. Pull out the insulated ground pin out of the housing.